


The compact storage and transport system



DATASHEET · EN · 251113 · LINEAR HOIST · 1/5

Technical data and illustrations not binding for deliveries. Subject to change without notice.

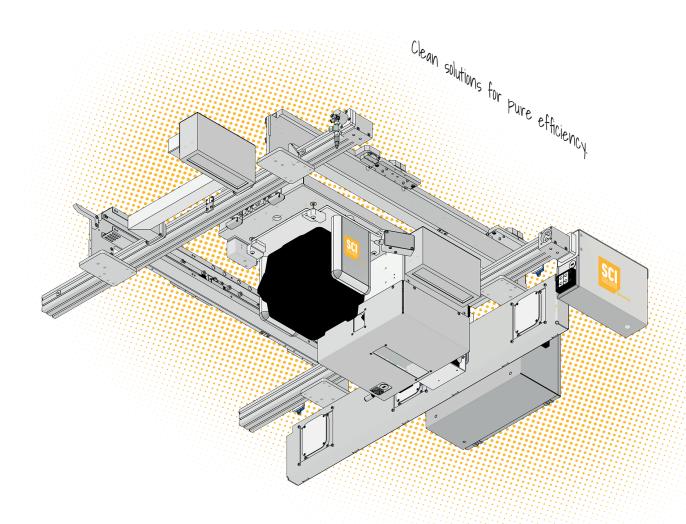

The compact storage and transport system

System Specifications

Technical Data	
Compatible Carrier Types	FOUP / FOSB with top flange / HA 200
ISO Class (ISO14644)	3
Length	Max. 25 m
Width*	1,75 m
Hoisting height**	3,5 m
Average delivery rate	depends on project and carrier types
Interfaces	SEMI-E153 MCS / SEMI-E84 Transfer
Control System	Siemens TIA PLC
Inventory Management	SHostPro
Power Consumption	7 kW
* y – axis (horizontal) ** z – axis (vertical)	









 $DATASHEET \cdot EN \cdot 251113 \cdot LINEAR \ HOIST \cdot 2/5$

Technical data and illustrations not binding for deliveries. Subject to change without notice.





The compact storage and transport system

Application

The Linear Hoist is our Overhead Transport Systems (OHTS) as well as storage system for the automated storage and retrieval and delivery of different wafer carrier types and/or tools throughout the intrabay. This is a support system of precision and efficiency paramount in the production


of microelectronic devices, serving as a bridge between different tools and equipment, that ensures a smooth flow of production while maintaining product integrity and cleanliness.

Storage Spaces	
HA 200	Depends on space and client requirements
FOUP / FOSB Top flange	Depends on space and client requirements

Features

Features	
Robot Axes and High Packing density	Air extraction on axis and Airflow Monitoring
Desktop PC Win 10 LTSC 24" Panel	Aluminum anodized, powder-coated materials, stainless steel.
Stainless steel buffed to < Ra 0,8 surfaces	Energy and signal transmission via cables to the gripper

Key Benefits

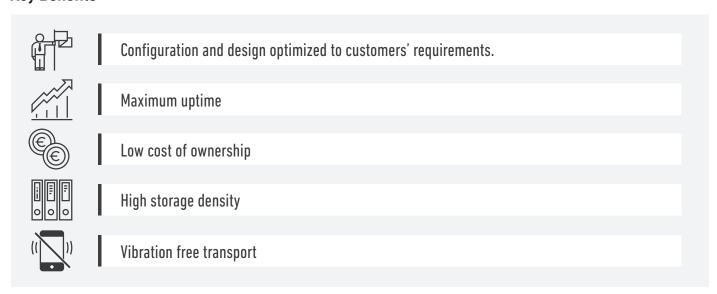

The Linear Hoist automated carrier reduces the need for manual handling and offers a variable number of storage possibilities with a zero footprint. Together with our NEST on the fab floor, it composes a complete storage

and delivery system, allowing even the opening of HA 200 boxes. The storage up to ISO class 3 ensures a contamination free storage in a vibration free environment. Governed by the EMS, it eliminates the risk of errors.

DATASHEET · EN · 251113 · LINEAR HOIST · 3/5

Technical data and illustrations not binding for deliveries. Subject to change without notice.



The compact storage and transport system

System Extras and Configuration Options

Extras

Magnetic Conveyor extensions

Connection to other equipment ports

Integration of external equipment (CV, AGV, Sorter, Shuttle)

Variable number of nests and transfers

System redundancy through cross-functional vehicles (parallel system)

Key Benefits



Streamline the workflow




Improve operational efficiency



Reduced contamination risk



Integrated inventory control

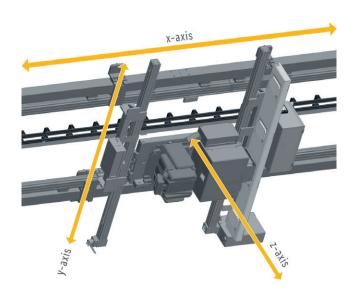

DATASHEET · EN · 251113 · LINEAR HOIST · 4/5

Technical data and illustrations not binding for deliveries. Subject to change without notice.





The compact storage and transport system



Our commitment to Industry 4.0



Our commitment to the Environment

Our systems support IoT

Interconnected Systems

Data Security

End-to-end visibility

Preventative maintenance software and analytics

Energy efficiency

Reduced carbon footprint through our corporate philosophy,

using local providers, minimizing packaging, electric cars





MORE INFORMATION

email sci@schiller.de
web sci.schiller.de



Website and Video:
Get more information and see
how the Linear Hoist
works!

DATASHEET · EN · 251113 · LINEAR HOIST · 5/5

Technical data and illustrations not binding for deliveries. Subject to change without notice.